


THERMO MODULE DATA

Model **KSM-06007E** (RoHS (EU) 2015/863 Compliant)



Th	$\Delta T_{max}(^{\circ}C)$	I _{max} (A)	V _{max} (v)	Q _{cmax} (w)
27°C	67	6.0	0.8	2.9
70°C	83	6.0	1.0	3.4


	W	L1	L2	H
Size(mm)	10.3	10.3	12.2	3.8
Tolerance(mm)	±0.5	±0.5	±0.5	±0.15
Metallization	Nil			
Ceramic material	Alumina			
Assembly solder	SnAgCu (melting point : 217°C)			



Performance Diagram

Th=27°C

Th=70°C

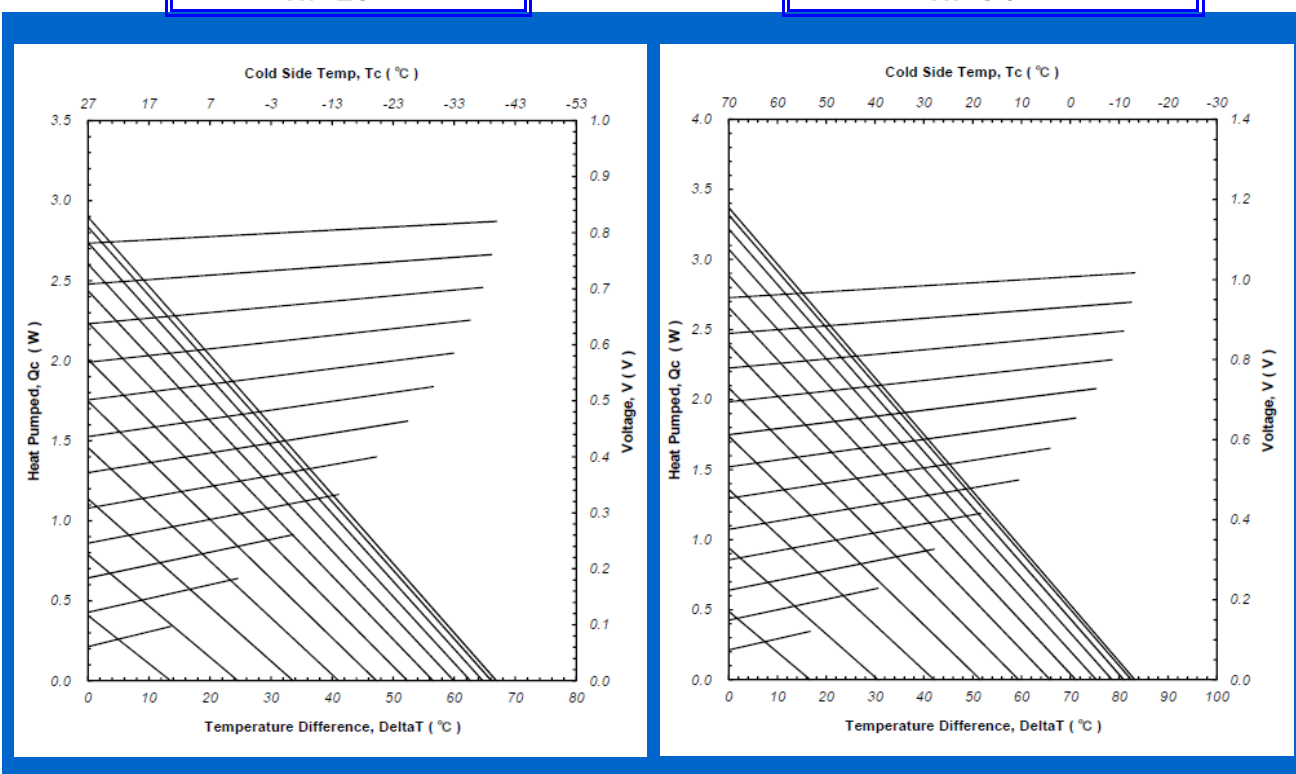

Ambient Nitrogen

Current value I = 0.5 - 6.0 A (Step = 0.50 A)

KELK Ltd.

■ Head Office & Factory

■ Inquiry

www.kelk.co.jp

3-25-1, Shinomiya, Hiratsuka-shi, Kanagawa-ken, 254-8543, Japan

Phone: +81-463-22-8724 Fax: +81-463-22-3692

<https://www.kelk.co.jp/english/contact/>

Phone: +81-463-3697 Fax: +81-463-24-6749