



THERMO MODULE DATA

Model **KSM-06127E** (RoHS (EU) 2015/863 Compliant)

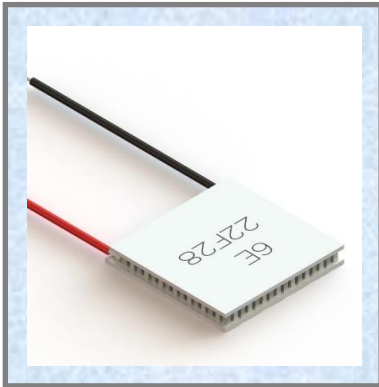

Th	$\Delta T_{max}(^{\circ}C)$	$I_{max}(A)$	$V_{max}(v)$	$Q_{cmax}(w)$
27 $^{\circ}C$	67	6.0	14.7	51.9
70 $^{\circ}C$	83	6.0	18.3	60.3


	W	L1	L2	H
Size(mm)	40.0	40.0	41.5	3.8
Tolerance(mm)	± 0.5	± 0.5	± 0.5	± 0.15
Metallization	Nil			
Ceramic material	Alumina			
Assembly solder	SnAgCu (melting point : 217 $^{\circ}C$)			



Performance Diagram

Th=27 $^{\circ}C$

Th=70 $^{\circ}C$

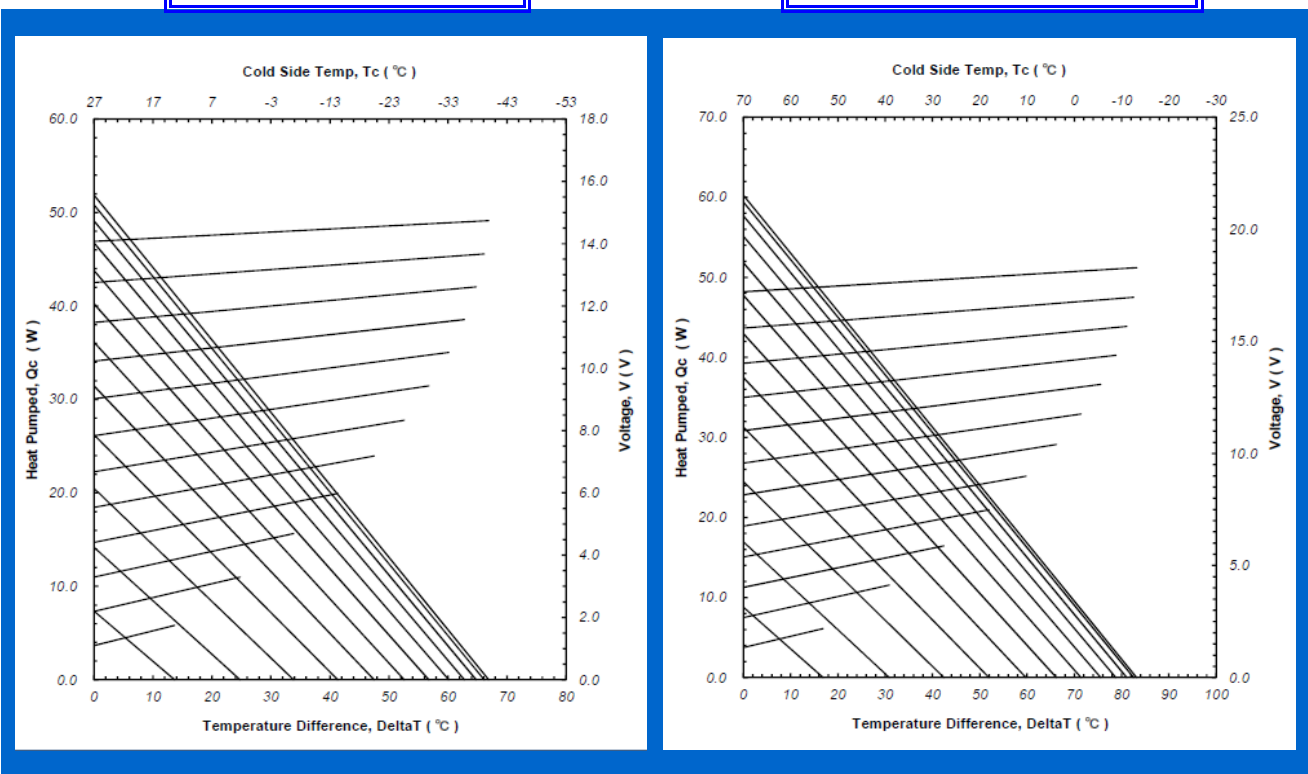

Ambient Nitrogen

Current value $I = 0.5 - 6.0 A$ (Step = 0.50 A)

KELK Ltd.

■ Head Office & Factory

■ Inquiry

www.kelk.co.jp

3-25-1, Shinomiya, Hiratsuka-shi, Kanagawa-ken, 254-8543, Japan

Phone: +81-463-22-8724 Fax: +81-463-22-3692

<https://www.kelk.co.jp/english/contact/>

Phone: +81-463-3697 Fax: +81-463-24-6749