


THERMO MODULE DATA

Model **KSM - 06007C** (RoHS 2002/95/EC Compliant)



Th	Tmax()	I _{max} (A)	V _{max} (v)	Q _{cmax} (w)
27	64	6.0	0.8	3.0
50	73	6.0	0.9	3.4


	W	L1	L2	H
Size(mm)	10.3	10.3	12.2	3.80
Tolerance(mm)	±0.5	±0.5	±0.5	±0.15
Metallization	Nil			
Ceramic material	Alumina			
Assembly solder	SnAgCu (melting point : 217)			



Option

Tolerance	Average Hight : ±0.025mm
Dew Condensation Provention	Epoxy Seal

Performance Diagram

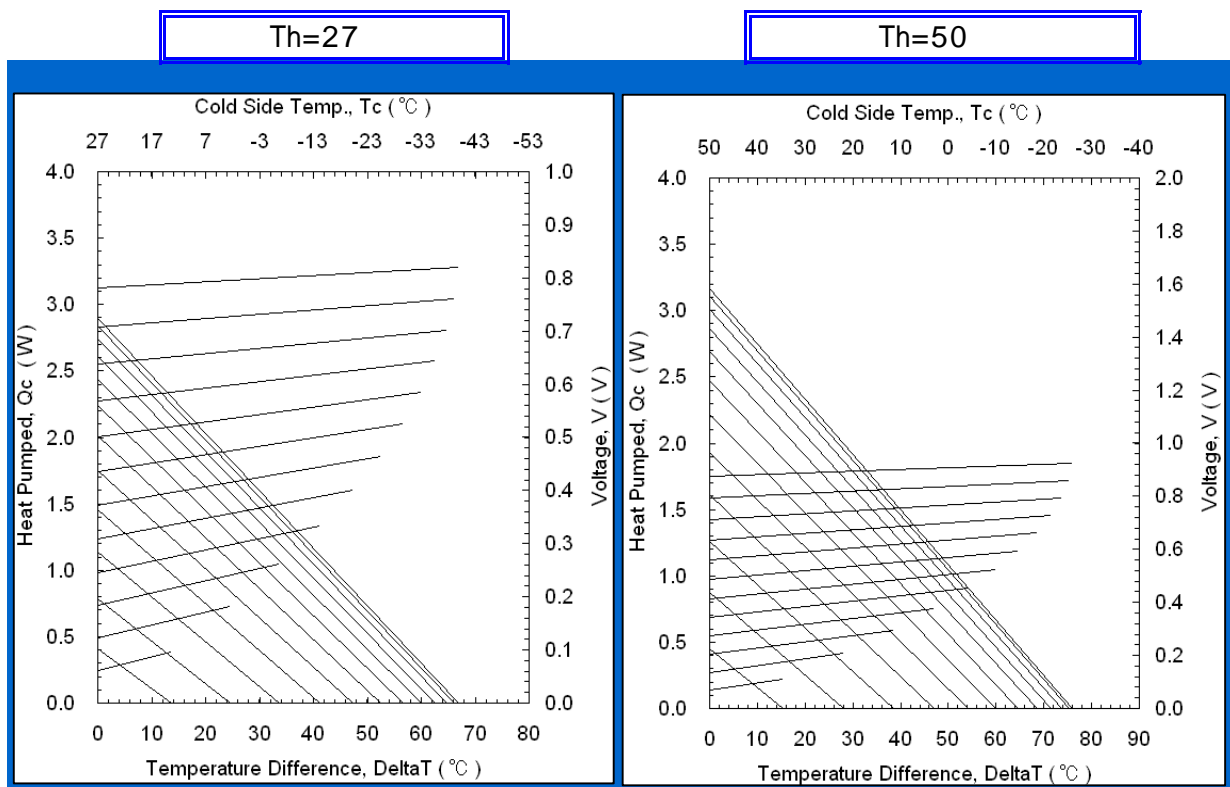

Ambient	Nitrogen
Current value	I = 0.5 - 6.0 A (Step = 0.50 A)

KE L K Ltd.

www.kelk.co.jp

Head Office & Factory

3-25-1,Shinomiya,Hiratsuka-shi,kanagawa-ken, 254-8543, Japan

Phone: +81-463-22-8724 Fax: +81-463-22-3692

Thermoelectric Module Div.

3-25-1,Shinomiya,Hiratsuka-shi,kanagawa-ken, 254-8543, Japan