



THERMO MODULE DATA

Model **KSM - 04017C** [RoHS 2002/95/EC Compliant]

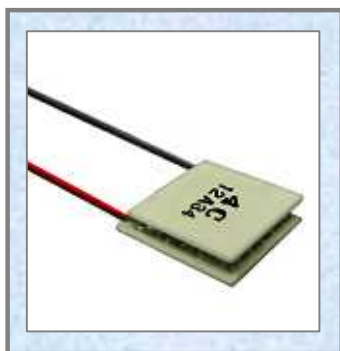

Th	Tmax()	Imax(A)	Vmax(v)	Qcmax(w)
27	64	4.0	2.0	4.8
50	73	4.0	2.2	5.4


Size(mm)	W	L1	L2	H
Size(mm)	15.0	15.0	17.0	4.65
Tolerance(mm)	±0.5	±0.5	±0.5	±0.15
Metallization	Nil			
Ceramic material	Alumina			
Assembly solder	SnAgCu (melting point : 217)			



Option

Tolerance	Average Hight : ±0.025mm
Dew Condensation Provention	Epoxy Seal

Performance Diagram

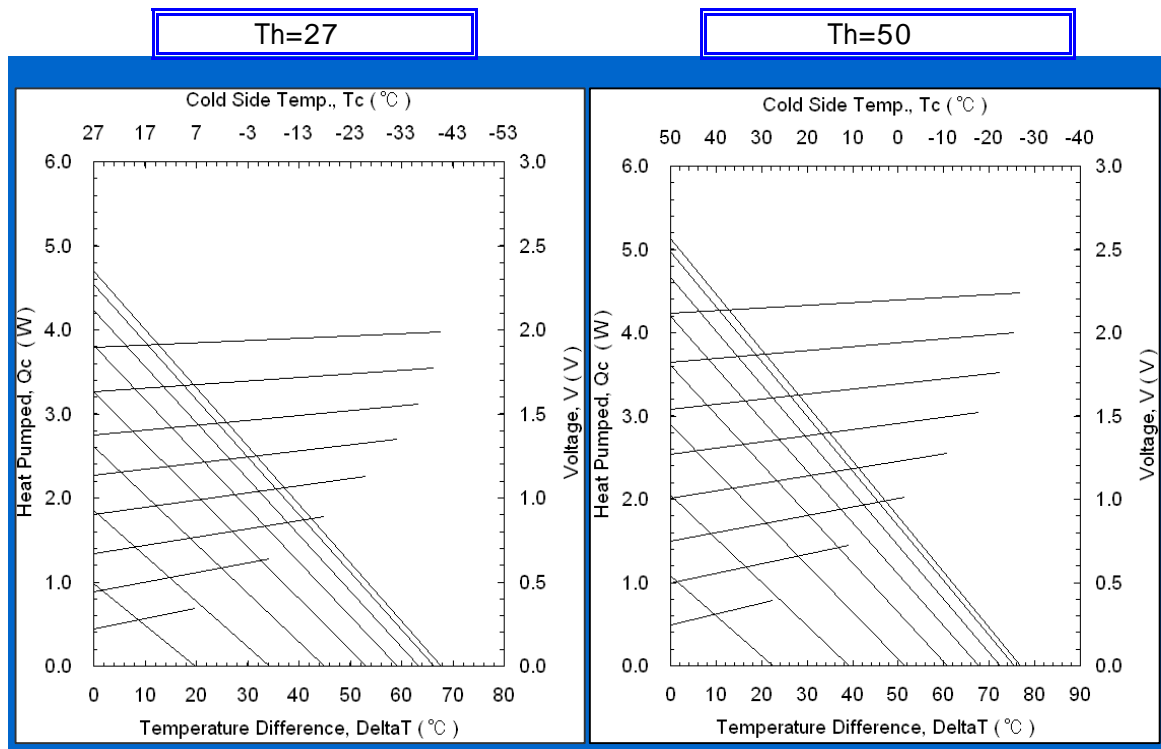

Ambient	Nitrogen
Current value	I = 0.5 - 4.0 A (Step = 0.50 A)

KELK Ltd.

Head Office & Factory

Thermoelectric Module Div.
Sales Group

www.kelk.co.jp

3-25-1,Shinomiya,Hiratsuka-shi,kanagawa-ken, 254-8543, Japan

Phone : +81-463-22-8724 Fax : +81-463-22-3692

3-25-1,Shinomiya,Hiratsuka-shi,kanagawa-ken, 254-8543, Japan

Phone : +81-463-23-3697 Fax : +81-463-24-6749

E-mail : sales@kelktech.komatsu.co.jp